





Swimming Pool Equipment & Accessories



Aqualux Pool Products Pvt.
Ltd. is a Bangalore based company dedicated to supply of high quality equipment and accessories for swimming pools and spas. The products are mainly aimed at the Asian Market.



Quality and service standards are the way of life at Aqualux Pool Products Pvt. Ltd. We follow strict norms of quality when it comes to sourcing, services and working environment. We sincerely believe that this quality-consciousness is our core strength. With combined man years' experience of over 25 years, we are in a much better position to offer you the best products and services at most competitive price.

All our products have been carefully designed to guarantee the comfort and security of the end users. You will find reliable solution in our products. Maintaining the quality of pool and spa water is our priority and we stringently test our products to ensure that they are easy to install, require minimum maintenance and provide long term pool and spa care.

With a highly oriented and committed team, we guarantee a quick and reliable understanding of your requirements with an efficent and safe logistic service set up. "Aqualux Pool Products Pvt. Ltd. is the most reliable and innovative pool partner in India" "We bring the world of Pools and Spas...right to your door step".

We would sincerely appreciate your business relationship and work towards success of your ventures. We invite you to personally meet us and discuss how we could be of assistance to you.







































- 1. HOTEL TAJ BANGALORE
- 2. DOUBLE TREE HILTON HOTEL BANGALORE
- 3. ITC GARDENIA HOTEL BANGALORE
- 4. FAIR FIELD MARRIOTT BANGALORE
- 5. YELAHANKA AIR FORCE BANGALORE
- 6. GRS FANTACY PARK MYSORE
- 7. WONDERLA BANGALORE
- 8. BLUE MOON JAMMU KASHMIR
- 9. ALOFT HOTEL COIMBATORE
- 10. HOTEL HAMPI INTERNATIONAL
- 11. MEGALAYA CLUB
- 12. NAGALAND
- 13. ALPS HOTEL MADURAI
- 14. BBMP PROJECT BANGALORE
- 15. BHADRAVATHI, NIRMITHI KENDRA, SHIMOGA





Sand Filter	- 05
Pumps	- 08
Underwater Light	- 10
Pool Cleaning Accessories	- 12
Pool Fittings/ Chemicals	- 14
Skimmers	- 15
Transformer/Catridge Filter	
/Safety Equipments	- 16
Ladder	- 17
Main Drain / Grating	- 19
Spa Accessories/Air Blower	- 20
Heat Pump/Online Heater	- 21
Readymade Pools/Lane Ropes/Sauna	- 22
Chlorine Feeder/Counter Flow System	- 23
Robotic Cleaner/Salt Chlorinator	- 24
Starting Block/Pipeless Filter/Beach Bed	- 25

We reserve the right to change all or part of the features of the articles or contents of this document, without prior notice www.aqualuxinc.com





SAND FILTER







Bobbin Sand Filter

- 1. Well recognized for its strength and reliability with advanced technology and machineries.
- 2. The filter tank is made of an inner fibreglass bladder to resist implosion and high pressure capability with a gel coat layer to avoid capillarity.
- 3. All components are injection moulded from high strength engineering plastic.
- 4. Available from 400mm/16" up to 1200mm /48".
- 5. Inner component materials made of latest generation plastic resins.
- 6. The multiport valve fixed with a clamp system that is easy to remove and quickly locks in its place.
- 7. The maximum working pressure is 2.5kg/cm2.
- 8. Sand filters provided with valve for models using 1,5" and 2" connections.







0.00
-
S
Š
SO
60
60
ries
60
Series
T Series
T Series
T Series

Code	Description	Ø Filter D mm	H mm	M	N mm	Connecti ons	Flow rate m3/h	Pool (volume) m3(8 hours)	Sand Kg	Max working pressure Kg/cm ²	N.W Kg
AQL10201	400mm(16") Sand filter with 1.5" valve	400	820	710	650	1.5"	6	48	50	2.5	12
AQL10202	460mm(18") Sand filter with 1.5" valve	460	840	725	655	1.5"	8	64	75	2.5	15
AQL10203	500mm(20") Sand filter with 1.5" valve	500	895	785	725	1.5"	10	80	100	2.5	16
AQL10204	600mm(24") Sand filter with 1.5" valve	600	980	880	820	1.5*	14	112	150	2.5	18.5
AQL10205	700mm(28") Sand filter with 1.5" valve	700	1040	930	870	1.5"	16	128	200	2.5	20.6
AQL10206	700mm(28") Sand filter with 2" valve	700	1125	980	900	2"	21	168	200	2.5	20.6
AQL10207	800mm(32") Sand filter with 2" valve	800	1235	1090	1010	2"	24	192	330	2.5	23.8
AQL10208	900mm(36") Sand filter with 2" valve	900	1280	1145	1065	2"	35	248	410	2.5	28.6
AQL10209	1000 mm(40") Sand filter with 2" valve	1000	1400	1340	1260	2"	39	322	620	2.5	60.
AQL10210	1200 mm(48") Sand filter with 2" valve	1200	1500	1450	1370	2"	56	442	880	2.5	87.



Code	Description	Ø Filter D mm	H mm	M	N mm	Connecti ons	How rate m3/h	Pool (volume) m3(8 hours)	Sand Kg	Max working pressure Kg/cm ²	N.V Kg
AQL10301	400mm(16") Sand filter with 1.5" valve	400	635	360	235	1.5*	6	48	50	3	12
AQL10302	460mm(18") Sand filter with 1.5" valve	460	590	418	282	1.5"	8	64	75	3	15
AQL10303	500mm(20") Sand filter with 1.5" valve	500	710	460	335	1.5*	10	80	100	3	16
AQL10304	600mm(24") Sand filter with 1.5" valve	600	730	488	352	1.5*	14	112	150	2.5	18.
AQL10305	700mm(28") Sand filter with 1.5" valve	700	855	515	285	1.5*	18	144	200	2.5	20.
AQL10306	700mm(28") Sand filter with 2" valve	700	855	515	285	2"	21	168	200	2.5	20.
AQL10307	800mm(32") Sand filter with 2" valve	800	965	600	370	2"	24	192	330	2.5	23.
AQL10308	900mm(36") Sand filter with 2" valve	900	1030	675	405	2"	35	248	410	2.5	28.
AQL10309	1000mm(40") Sand filter with 2" valve	1000	1200	770	700	2"	40.2	322	620	2.5	60.
AQL103010	1200mm(48") Sand filter with 2" valve	1200	1410	1005	945	2"	56	422	860	2.5	87

SAND FILTER






MAGNUM Commercial Sand Filter

- 1. Filter tank is made of Polyester and non-corrosive fiberglass filaments winding.
- 2.All internal components and connections are injection moulded PVC.
- 3. Extra deep sand bed allows for efficient filtration and backwashing.
- 4. Designed to be assembled with Butterfly valve and 2X3" oil pressure gauges.
- 5. Large service opening (manhole) gives easy access to inside part of filter (optional).
- 6. Sight glass made of top quality material (optional).
- 7.Maximum operating pressure 4 kg/cm2.
- 8.UV-resistant surface enables the filters to work in direct sunlight.
- 9.Best Choice for an efficient water filtration for public swimming pool and industrial water treatment system.













Code	Description	Ø Filter Dia B mm	Height A mm	VALVE HEIGHT C mm	VALVE PORT SIZE mm	FILTER AREA m2	Flow rate m3/h	Sand kg
AQL31701	"MAGNUM" COMMERCIAL SAND FILTER DIA: 1200MM (48")	1200	1400	900	80	1.13	56	850
AQL31702	"MAGNUM" COMMERCIAL SAND FILTER DIA: 1400MM (56")	1400	1650	1000	100	1.54	82	1350
AQL31703	"MAGNUM" COMMERCIAL SAND FILTER DIA: 1600MM (64")	1600	1800	1100	100	2	102	2300
AQL31704	"MAGNUM" COMMERCIAL SAND FILTER DIA: 1800MM (72")	1800	1900	1300	150	2.7	124	2900
AQL31705	"MAGNUM" COMMERCIAL SAND FILTER DIA: 2000MM (80")	2000	2000	1350	150	3.14	150	4000
AQL31706	"MAGNUM" COMMERCIAL SAND FILTER DIA: 2300MM (92")	2300	2200	1500	200	4.3	219	6000
AQL31707	"MAGNUM" COMMERCIAL SAND FILTER DIA: 2500MM (100")	2500	2300	1600	200	4.9	240	6700

Code	Description
AQL21201	Multiport Valve Top Mount 1.5" complete with fittings
AQL21202	Multiport Valve Top Mount 2" complete with fittings
AQL21101	Multiport Valve Side Mount 1.5"
AQL21102	Multiport Valve Side Mount 2"

Code	Description
AQLOSM/45	2" Pressure Gauge-Side Mount 0-45 PSI Connection 1/4"
AQL0SM/60	2" Pressure Gauge-Side Mount 0-60 PSI Connection 1/4"
AQLOSM/60/S	2" Pressure Gauge-Side Mount 0-60 PSI Connection 1/8"
AQL0BM/45/S	2" Pressure Gauge-Back Mount 0-45 PSI Connection 1/8"
AQLOBM/60	2" Pressure Gauge-Back Mount 0-60 PSI Connection 1/4"

06

SAND FILTER





Combo Pack for Above Ground Housing

- 1. Three pieces of housing that holds and covers pre-assembled filtering equipment. a bobbin wounded sand filter with top mounted multi-port valve, a recirculation pump, a timer controller (optional) and a chlorine tablet feeder unit (optional).
- 2. The housing made of reinforced fiber glass making it highly resistant to corrosion, all bad weather conditions and low/high temperatures. Ideal for its outdoor location.
- 3. The top housing consisting of two pieces joined by hinges, allowing it to be opened to do internal operations. Suitable for all kinds of pools.



Code	Sand Filter	Pump	Filter Flow rate	Size	Connection	Voltage	Max Working Pressure	Chlorine Feeder (Optional)	Timer Controller (Optional)
AQL10101	Ø400Bobbin	1/3 HP	7.0 m3/h	1000* 1100*820mr	m 1.5"	230V II 50Hz	0.9kg/cm2	In-line 1.9kg	1 pump control
AQL10102	Ø500Bobbin	1/2 HP	7.8 m3/h	1000* 1100*820mr	m 1.5"	230V II 50Hz	1.2kg/cm2	In-line 1.9kg	1 pump control
AQL10103	Ø600Bobbin	3/4 HP	10.4 m3/h	1000* 1100*820mr	m 1.5"	230V II 50Hz	1.4kg/cm2	In-line 1.9kg	1 pump control

laminated sand filter

- 1. Well recognized for its durability and reliability and latest European technology
- 2. Easy and comfortable access to the inside of the tank for operation
- 3. Made of polyester resin and fiberglass.
- 4. The external layer of colored-gel coating assuring the tank is watertight meanwhile giving the surface a high gloss end
- 5. Available size from 500mm/20" up to 1200mm/48"
- 6. Inner components made of latest generation plastic resins
- 7. Maximum working pressure 2,5kg/cm2
- 8. All sand filter models with valve using 1.5",2" or 3" (flange) connections





Code	Description	Filter Size		Connections	Flow rate	Sand	Max Working Pressure	N.W		
		D mm	H mm	mm Amm Bmm			m3/h	(kgs)	Pressure kg/Cm2	(kgs)
AQL4101	500 mm(20") sand filter with 1.5" valve	500	710	335	125	1.5"	9	100	2.5	19
AQL4102	700 mm (28") sand filter with 1.5" valve	700	700	515	285	1.5"	21	300	2.5	32.5
AQL4103	800 mm (32") sand filter with 2" valve	800	870	370	230	2"	25	450	2.5	47.7
AQL4104	1000 mm (40") sand filter with 2" valve	1000	925	400	230	2"	40	500	2.5	56

Code	Description	Filte D mm		Size		Connections	Flow rate m3/h	Sand (kgs)	Max Working Pressure kg/Cm2	N.W (kgs)
AQL4105	1000 mm verticle (38") sand filter with 2" valve			400		2"	55	950	2.5	60.5
AQL4106	1200 mm verticle (47") sand filter with 2" valve	1200	1860	570	350	3"	66	1500	2.5	


PUMPS






Marathon Pump

- 1. Self-priming pump designed to work under a vast type of conditions, strong and durable.
- 2. Available from 0.5 HP upto 3 HP.
- 3. Easy to maintain, see-through lid, large strainer and easy-to-remove drain plugs for fast winterization.
- 4. Performance and pressure test for all the items prior to shipment to ensure superior quality.
- 6. Other options like 316SS shaft for salted water, 230V/60Hz motors are available.










80

Code	Description	MODEL	HP	H m, w.c.	Flow m3/h	Max Noise level DB(A)
AQL10D01	Marathon Pump 0.5 HP	Single Phase	0.5	8	10.4	65
AQL10D02	Marathon Pump 0.75 HP	Single Phase	0.75	10	12.7	65
AQL10D03	Marathon Pump 1 HP	Single Phase	1	10	16.4	65
AQL10D04	Marathon Pump 1.5 HP	Single Phase	1.5	10	23	65
AQL10D05	Marathon Pump 2 HP	Single Phase	2	12	26	70
AQL10D06	Marathon Pump 3 HP	Single Phase	3	14	35	70
AQL10D09	Marathon Pump 1 HP	Three Phase	1	10	16.4	65
AQL10D10	Marathon Pump 1.5 HP	Three Phase	1.5	10	23	65
AQL10D11	Marathon Pump 2 HP	Three Phase	2	12	26	70
AQL10D12	Marathon Pump 3 HP	Three Phase	3	14	35	70

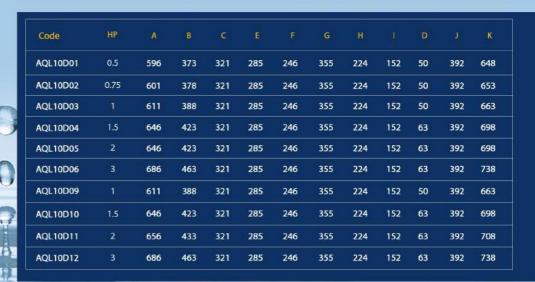






SPARTA PUMPS

- * SPARTA is built for easy operation including features like see-through lid for easy inspection and a large strainer extends time between cleaning. Motor materials are rustproof, stainless steel motor shaft & sealed bearings that never need lubrication. It is thermoplastic housing withstands extreme heat and resist corrosion.
- * Five Models are Available 033,050, 075, 100 and 125.

CODE	MODEL	TYPE	Н	Flow	
CODE	MODEL	ITPE	m.w.c.	m3/h	
04010G01	033		6	7	
04010G02	050	230V	8	7.8	
04010G03	075	50HZ SINGLE	10	8.1	
04010G04	100	PHASE	12	8.8	
04010G05	125	1111102	12	11.5	





AQUALUX SWIMMING POOL PUMP TECHNICAL DETAILS

MODEL	QMAX (UMIN)	HMS (M)	V/HZ	POWE KW	A(P1) HP	AMPS	FITTING SIZE (MM)		KG	Packing Size (MM)	QTY/20
ATP-50	210	n	12600	0.37	0.5	2		443	7	470x180x285	1202
ATP-75	240	10.5	14400	0.55	0.75	3.2	48.5 or 50	465	8.8	505x195x295	
ATP-100	275	11	16500	0.75	1	3.8		465	9.5		1153
ATP-120	300	13	18000	0.99	1.2	4.6		465	9.8		
ATP-150	430	16.5	25800	1.1	1.5	5.8		573 14	14	615x305x345	448
ATP-200	520	18	31200	1.5	2	7	60.3 or 63	573	15.5		
ATP-250	600	19	36000	1.85	2.5	8.5	00.3 0 03	573	16.5		
ATP-300	635	19.5	38100	2.2	3	10		598	18	645x305x345	430





MODEL	VOLTAGE	POW KW	/ER(P1) HP	Hmax (m)	Qmax (m3/h)	Motor Speed (r/min)	Port size (mm)
ACN-400	380/50 Hz	3.0	4.0	21	50	2800	63/75 2.0"/2.5"
ACN-550	380/50 Hz	4.0	5.5	22	60	2800	75 2.5"





UNDER WATER LIGHT





Flat Under water light LED & Halogen

- * Best option for illuminating existing pools, quickly and conveniently adding light and life to your pool
- * Manufactured in polyamide and ABS, resisting chemicals and temperature variations for years
- * Readily fitted to any existing pool, as it requires no niche for installation
- * Anchored directly to the wall with a reinforced plastic cross, anchor plugs and screws
- * Patented locking system, Easy process of lamp substitution
- * Available with

75W halogen lamp,

144 color LED plate (1 program - automatic color change),

144 white LED plate,

243 color LED plate (1 program - automatic color change),

243 color LED plate with remote control

- * For concrete and prefabricated pools
- * CE certified by SGS

Code	Model	LED Lamps	Remote Control	Front Plate	w	V	Cable (m)
AQL20601	Halogen	- 3t - 4t	NO	ABS	75	12	2,5
AQL20602	Halogen	· -	NO	ABS	75	12	2,5
AQL20603	White LED	144	NO	ABS	12	12	2,5
AQL20604	Color LED	144	NO	ABS	12	12	2,5
AQL20605	White LED	243	NO	ABS	20	12	2,5
AQL20606	Color LED	243	NO	ABS	20	12	2,5
AQL20607	Color LED	243	YES	ABS	20	12	2,5
AQL20613	White LED	144	NO	ABS	12	12	2,5
AQL20614	Color LED	144	NO	ABS	12	12	2,5
AQL20615	White LED	243	NO	ABS	20	12	2,5
AQL20616	Color LED	243	NO	ABS	20	12	2,5
00100417	Color LCD	0/17	UCC	AOC	00	10	0.5





Under water light Halogen with Niche

- * Designed to be used fully submerged under water in fresh water swimming pools
- * Class III electric device with very low voltage for safety (12V with alternative current)
- * IP68 degree of protection at a nominal immersion depth of 2m
- * Face plates available in both ABS and 316SS
- * 2,5m long cable included
- * Available for concrete and liner pools
- * Easy to operate improving all the maintenance operations such as a lamp replacement
- * Basic dimensions are: Diameter 290 mm Depth 165 mm

Code	Model	Front Plate	Bulbw	v	Diameter (mm)	Depth (mm)	Cable (m)
AQL20101B	Concrete	ABS	PAR56 300W	12	290	165	2,5
AQL20111B	Concrete	SS	PAR56 300W	12	290	165	2,5
AQL20101B	Liner	ABS	PAR56 300W	12	290	165	2,5
AQL20112B	Liner	SS	PAR56 300W	12	290	165	2,5



Under Water Light






Underwater light LED with Niche

- Designed to be used fully submerged underwater in fresh water swimming pools
 Manufactured in polyamide and ABS resistsing chemicals and temperature variations for years
 Class III electric apparatus with very low voltage for safety (12V with alternate current)
- PARS6 lamp complying with IP68 degree of protection (resistance to penetration of dust, solid bodies and humidity) at a nominal immersion depth of 2 m
- Environmental friendly
- Comparing with a halogen lamp you are decreasing consumption and saving energy
- Available for concrete and liner pools
 Optional polished stainless steel face plate
 30.000 hours LED lamp life
- Supplied in color and white light
- PAR56 lamps are available in 144Led bulbs and 252Led bulbs
- In the color 252Led bulbs model a remote control is optional.

Diameter	290mm
Depths	165mm
Brightness 144Led lamp white	550Lm
Brightness 144Led lamp RGB	400Lm
Brightness 144Led lamp white	1020Lm
Brightness 144Led lamp RGB	770Lm







Code	Model	Face Plate	Lamp Type	No. Bulbs	D Colour	Watts (W)	Voltage (V)	Remote Control	Cable (m)
AQL20501B	Concrete	ABS	PAR56	144	White	12	12	NO	2,5
AQL20502B	Concrete	ABS	PAR56	144	RGB	12	12	NO	2,5
AQL20505B	Concrete	ABS	PAR56	144	RGB	12	12	YES	2,5
AQL20503B	Concrete	ABS	PAR56	252	White	21	12	NO	2,5
AQL20504B	Concrete	ABS	PAR56	252	RGB	21	12	NO	2,5
AQL20506B	Concrete	ABS	PAR56	252	RGB	21	12	YES	2,5
AQL20511B	Liner	ABS	PAR56	144	White	12	12	NO	2,5
AQL20512B	Liner	ABS	PAR56	144	RGB	12	12	NO	2,5
AQL20515B	Liner	ABS	PAR56	144	RGB	12	12	YES	2,5
AQL20513B	Liner	ABS	PAR56	252	White	21	12	NO	2,5
AQL20514B	Liner	ABS	PAR56	252	RGB	21	12	NO	2,5
AQL20516B	Liner	ABS	PAR56	252	RGB	21	12	YES	2,5



Code	MODEL	FACE PLATE	LED NO. BULBS	COLOUR	WATTS (W)	VOLTAGE(V)	REMOTE CONTROL
AQL-005	SS LED LIGHT	SS	144	WARM/ COOL/RGB	12	12	NO

**						_		
IMAGES	Code	MODEL	FACE PLATE	LED NO. BULBS	COLOUR	WATTS (W)	VOLTAGE(V)	REMOTE CONTROL
8	AQL-M001	NICKEL LED MINI LIGHT	NICKEL	3	COOL WHITE / RGB	3	12	NO
(AQL-M002	ABS LED NICHE MINI LIGHT	ABS	12	RGB/HALOGEN	3/W-50	12	NO
	AQL-M003	NICKEL COATED LED MINI LIGHT	NICKEL	1/3/6/9/12	WARM/ COOL/BLUE	1/3/6/9/12	12	NO
	AQL-004	ABS LED LIGHT	ABS	12/24	WARM/COOL/ HALOGEN	7.2/14.4/100	12	NO

Pool Cleaning Accessories





Extruded PE and EVA Vacuum Hose

Code	Description
AQL007 - 7.5m	Blow Molded/EVA Vacuum Hose with Standard Cuff (7.5m \times 1-1/2")
AQL008 - 9m	Blow Molded∕€VA Vacuum Hose with Standard Cuff (9m x 1-1/2")
AQL009 - 12m	Blow Molded/EVA Vacuum Hose with Standard Cuff (12m x 1-1/2")
AQL010 - 15m	Blow Molded/EVA Vacuum Hose with Standard Cuff (15m x 1-1/2")
AQL011 - 30m	Blow Molded/EVA Vacuum Hose with Standard Cuff (30m x 1-1/2")
AQL012	EVA Vacuum Hose with Standard Cuff (10/20/30m x 2")



Telescopic Poles

Code	Description
AQL1301BU	2x0.8x1400mm Aluminium Pole fits SGL Cam (Silver) (3mtr)
AQL1302BU	2x0.8x1800mm Aluminium Pole fits SGL Cam (Silver) (4mtr)
AQL1303BU	2x0.8x2400mm Aluminium Pole fits SGL Cam (Silver) (5mtr)
AQL1308BU	3x0.8x2333mm Aluminium Pole fits SGL Cam (Silver) (7mtr)
AQL1310BU	3x0.8x3000mm Aluminium Pole fits SGL Cam (Silver) (9mtr)
AQL1352BU	2x1.1x2400mm Aluminium Pole fits SGL Cam (Silver) (5mtr)
AQL1356BU	3x1.1x2000mm Aluminium Pole fits SGL Cam (Silver) (6mtr)
AQL1357BU	3x1.1x2333mm Aluminium Pole fits SGL Cam (Silver) (7mtr)
AQL1359BU	3x1.1x3000mm Aluminium Pole fits SGL Cam (Silver) (9mtr)





Surface Net & Deep Net

Code	Description
AQL52 ∕AQL56€	Economy Leaf Skimmer
AQL30011BU	Heavy Duty Leaf Skimmer with 'Spring Clip' Handle (Nylon net)
AQLT55A	Heavy Duty Leaf Rake Australlian (Nylon net)
AQLT55€	Heavy Duty Leaf Rake with 'Spring Clip' Handle (Nylon net)
AQLT62H	Economy Deep net
AQLT139	Heavy Duty Leaf Skimmer with 'Spring Clip' Handle Small Mesh (Nylon net)



Pool Cleaning Accessories





Vacuum Head

Code	Description
AQL67	Triangular Vacuum Head with Swivel with PVC Bumper
AQL2004BU	Triangular transparent swivel vacuum head
AQL2009BU	14" Premium Aluminium vacuum head
AQL2010BU	18" Premium Aluminium vacuum head
AQL449	Swiveling Vacuum Head with Side Brush and Spring Handle
AQL2005BU	Rotative V.H/with side brush
AQL2013BU	Oval shape vacuum head
AQL2002BU	Crescent shape economy vacuum head
AQL2001BU	Premium rotative vacuum head
AQL70	14" Flexible Vacuum Head
AQL114	19" Delux Flexible Vacuum Head with Swivel & "Spring Clip"
AQL115	14" Delux Aluminium Vacuum Head
AQL116	18" Delux Aluminium Vacuum Head



Algae & Wall Brushes

Code	Description
AQL5015BU	5" Algae Aluminium Handle Brush
AQL5013BU	10" Algae Brush
AQL5004BU	18" Algae Brush
AQL5012BU	10" Plastic Brush
AQL5001BU	18" Plastic Brush
AQL5002BU	18" Metal Back Brush
AQL5005BU	18" Aluminium Handle Brush
AQL5007BU	24" Aluminium Handle Brush
AQL5008BU	36" Aluminium Handle Brush
AQL5011BU	36" Delux Aluminium Handle Brush
AQL5012	19" Blue & White Brush
AQL5013	20" Delux Hose Brush



POOL FITTINGS





Inlets, Suction Nozzle and Wall Conduit

- 1. Manufactured in white ABS with UV protection, the inlets adapt to any kind of concrete or prefabricated pool.
- 2. Including all the components you need for the best performance of your pool
- 3. Return Inlets return filtered and treated water to the pool
- 4. Suction Inlets are used to connect the pool cleaner
- 5. Conduits used to aid the installation of return and suction inlets
- 6. Adaptable in length for easier installation and replacement of the inlets in concrete pools
- 7. 300mm conduits long and can be adjusted to 250 and 170 mm
- 8. Inlets and Nozzles available for concrete and liner pools

Code	Description
AQL00101	Return wall inlet with eyeball for concrete pool
AQL00102	Return wall inlet with eyeball for liner pool
AQL00111	Return wall inlet to glue for concrete pool
AQL00201	Suction nozzle for concrete pool
AQL00211	Suction nozzle to glue for concrete pool
AQL00301	L-300mm wall conduit to glue external 63mm / internal 50mm
AQL00302	Floor Inlet
AQL00303	63mm Eyeball inlet
AQL0042BU	53 mm Eyeball inlet
AQL0043BU	63 mm Vacuum point
AQL0044BU	53 mm Vacuum point
AQL0045BU	1.5" Floor Inlet
AQL0046BU	2" Floor Inlet
AQL0047BU	2.5" Floor Inlet
AQL0048BU	3" Floor Inlet
AQL0049BU	4" Floor Inlet
AQL0050BU	Gutter drain



TEST KIT

Code	Description
AQL54	Basic PH & CL Test Kit (15ml)
AQL88	Test Kit refill (15ml)
AQL89	3 Way Test kit
AQL90	5 Way Test kit
AQL91	6 Way Test kit
AQL92	Thermometer






Chemical	Description
AQL1403	PH Plus
AQL1404	Algaecide
AQL1405	Enzyme Clarificant
AQL1406	TCCA 90 Granules
AQL1407	Alum Gel







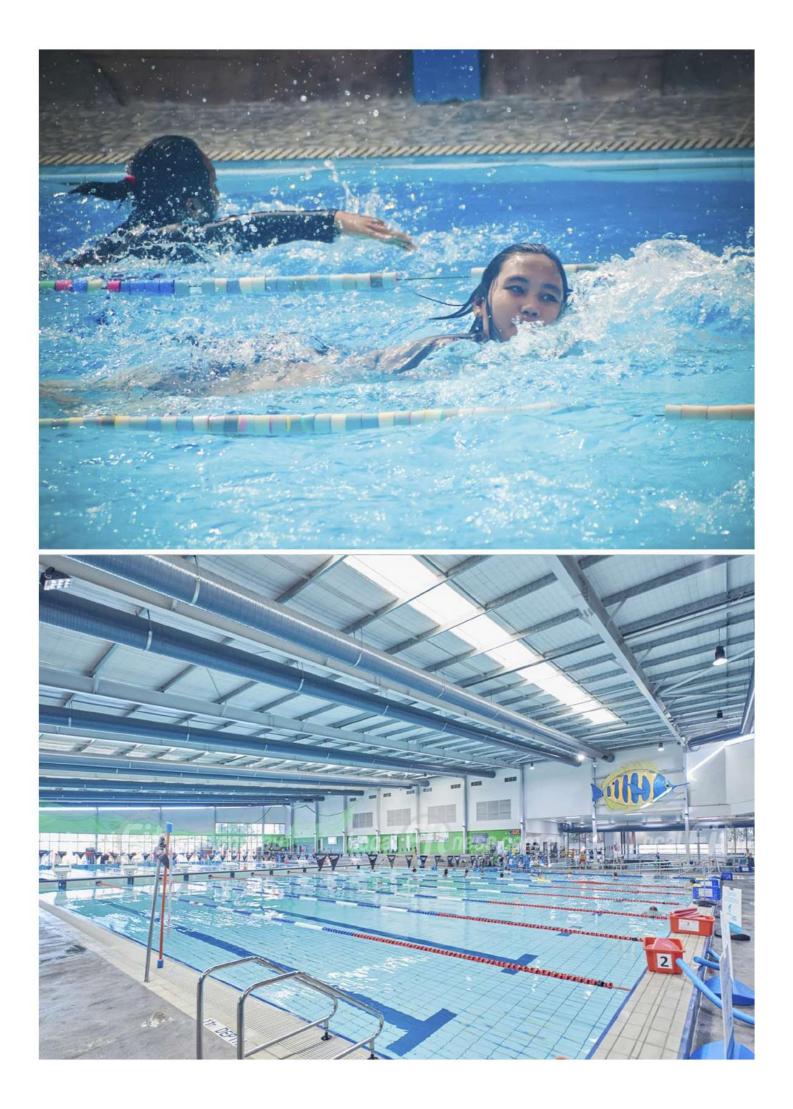

SKIMMERS





15L Skimmer

- 15L skimmer made of high resistant white ABS with UV protection included to prevent deterioration and extend its life.
- A silent floating flap and a flow regulator plug included.
- Connect it with a female 1.5", male 2" or a Dia 50mm connection to glue.
- Basket secured to base with bayonet fixing.
- Available for concrete and liner pools.
- Round or square deck as option for aesthetic purpose
- Available with regular or wide mouth.



CODE	Pool	Cover	Throat Type	N.W Kg	A	В	С	D (n	E nm)	F	G	н
AQL10101	Concrete	Round	Standard	2,20	201	140	416	111	221	243	50	х
AQL10102	Concrete	Round	Wide	3,70	494	228	416	122	211	439	50	17
AQL10103	Liner	Round	Standard	3,20	296	228	416	х	221	264	50	17
AQL10104	Liner	Round	Wide	4,00	494	228	416	122	211	439	50	17
AQL10111	Concrete	Square	Standard	2,33	201	140	416	111	230x230	243	50	х
AQL10112	Concrete	Square	Wide	3,90	494	228	416	122	230x230	439	50	17
AQL10113	Liner	Square	Standard	3,35	296	228	416	Х	230x230	264	50	17
AQL10114	Liner	Square	Wide	4,10	494	228	416	122	230x230	439	50	17

Skimmer for above Ground Pool

Code	Description
AQL31	Wall Skimmer with standard mouth
AQL32	Wall Skimmer with wide mouth









TRANSFORMER

Code	Rated Power (W)	Input Voltage (V)	Output Voltage (V)
AQL83 108	100	220~230V	12V

Available in 240V-12V IP64 Standard plug is European plug. Other plug types are available



JUNCTION BOX FOR UWL

Code	Description
AQL82903	Junction Box for UWL



CARTRIDGE FILTERS

Code	Description	Filter Area (m²)	Design Flow (m³/h)	Diameter (Ømm)	Height (mm)	Pipe Size (mm)	Micron (μm)
CF25	Cartridge Filter (F25	2.25	5.50	225	368.30	60/63	<15(µm)
CF50	Cartridge Filter CF50	4.63	11.40	225	548.30	60/63	<15(µm)



Ball Valve

Size	Connections			
	Female x Female	Plain x Plain	Flonged	
1.5"	AQL-65FFDU	AQL-65PPDU	N.A.	
۵.,	RQL-66FFDU	AQL-66PPDU	N.A.	



Size	Connections				
2120	Female x Female	Plain x Plain	Flonged		
1.5"	AQL-67FFDU	AQL-67PPDU	N.A.		
2"	AQL-68FFDU	AQL-68PPDU	N.A.		





SAFETY EQUIPMENT

AQL0061	Safety Ring Small
AQL0062	Safety Ring Big
AQL0063	Safety Hook
AOL0064	Safety Line Rope 15m & 30m
















Ladder

- Manufactured out of stainless steel AISI 304 tube with diameter 43 mm, width 500 mm in a shiny polished finish
- Safe and convenient to use. The safety design guarding against slippage or cuts.
- Each ladder style supplied with 2,3,4 or 5 steps
- Available for both stainless and plastic treads with width 50mm
- Coming with plastic stoppers that rest against the pool wall and protect it from damage, as well as with an anchor point, for a grounding connection.
- Other options like 316SS for salt water also available


Standard Handrail Ladder

Code	Treads	Tread Material	Size A (mm)	Size B (mm)
AQL10201	2	Stainless Steel	1330	710
AQL10202	3	Stainless Steel	1580	960
AQL10203	4	Stainless Steel	1830	1210
AQL10204	5	Stainless Steel	2080	1460
AQL10205	2	Plastic	1330	710
AQL10206	3	Plastic	1580	960
AQL10207	4	Plastic	1830	1210
AQL10208	5	Plastic	2080	1460



Overflow Handrail Ladder

Code	Treads	Tread Material	Size A (mm)	Size B (mm)
AQL10401	2	Stainless Steel	1287	587
AQL10402	3	Stainless Steel	1537	837
AQL10403	4	Stainless Steel	1787	1087
AQL10406	3	Plastic	1537	837
AQL10407	4	Plastic	1787	1087












LADDER

Mix Handrail Ladder




Code	Treads	Tread Material	Size A (mm)	Size B (mm)
AQL10301	2	Stainless Steel	1330	710
AQL10302	3	Stainless Steel	1580	960
AQL10303	4	Stainless Steel	1830	1210
AQL10304	5	Stainless Steel	2080	1460
AQL10305	2	Plastic	1330	710
AQL10306	3	Plastic	1580	960
AQL10307	4	Plastic	1830	1210
AQL10308	5	Plastic	2080	1460



Wall Handrail Ladder



Code	Treads	Tread Material	Size A (mm)	Size B (mm)
AQL10601	2	Stainless Steel	1330	710
AQL10602	3	Stainless Steel	1580	960
AQL10603	4	Stainless Steel	1830	1210
AQL10604	5	Stainless Steel	2080	1460
AQL10605	2	Plastic	1330	710
AQL10606	3	Plastic	1580	960
AQL10607	4	Plastic	1830	1210
AQL10608	5	Plastic	2080	1460



SP Ladder



Code	STEP	MM	B MM	MM	MM MM	MM	F MM
AQL501	2+2	500	500	500	500	500	500
AQL502	3+3	700	700	700	700	700	700
AQL503	4+4	800	800	800	800	800	800
AQL504	5+5	1000	1000	1000	1000	1000	1000
AQL505	6+6	1000	1000	1000	1000	1000	1000


Main Drain / Grating







Main Drain

- * Made of white ABS with UV protection
- * Side connection with 2" female thread
- * Available for concrete and pre-fabricated pools.
- * Drain grilles used in concrete pools with a built-in main drain












Overflow Grating


- * Manufactured of PP including UV protection. This material has a high mechanical resistance and it is not altered by chemical and atmospheric agents.
- * An anti-slip surface and a multipurpose function as the same grating can be used for both curved and straight overflow.

Code	Description	(mm)	H (mm)	N.W (KG)	Unit Per Package
AQL50301	Straight and curve - Length 200 mm	200	22	0.03	450
AQL50302	Straight and curve - Length 250 mm	250	22	0.03	450
AQL50303	Straight and curve - Length 300 mm	300	22	0.03	450
AQL50304	Straight and curve - Length 300 mm (Double Link)	300	22	0.03	450
AQL50305	Straight and curve - Length 355 mm (Triple Link)	355	22	0.03	450
AQL50306	Straight and curve - Length 457 mm (Triple Link)	457	22	0.03	450









SPA ACCESSORIES

Code

AQLSPA01

AQLSPA02

AQLSPA03

AQLSPA04

AOLSPA05

AQLSPA06


AQLSPA07 AQLSPA08

AQLSPA09

AQLSPA10









JACUZZI PUMP

Model						Motor Speed	Port size
Model	90	KW	HP	(m)	(L/h)	(r/min)	(mm)
AQL-JP300	220-240V/50Hz	2.2	3.0	17	635	2900	63



AIR BLOWER

Code	Voltage (V)	Current (A)	Max Pressure KPa	Max Flow m³/h	Max Vacuum KPa	Power kw	Rotational Speed r/min	Noise dB(A)	N.W. kg	G.W. kg	Packing Size (cm)
AQL-250	220	2.5(3.0)	12(14)	48(57)	8.5(10)	0.25(0.30)	2800(3400)	<56	10.6	11.2	31x28x28
AQL-370	220	3.5(4.2)	16(19)	60(70)	11(13)	0.37(0.44)	2800(3400)	<56	11	11.7	31x28x28
AQL-550	220	4.8(5.76)	20(24)	110(132)	16(19)	0.55 (0.66)	2800(3400)	<60	12.6	14.1	32x31x30
AQL-750	220	6.3(7.56)	22(25)	145(170)	18(20)	0.75(0.90)	2800(3400)	<60	16.5	18.0	35x32x33

Code	L	w	Н	H1	H2	А	Al	A2	u	В	G	D	S	C
AQL-250	260	246	247	120	37	90	205	235	62	83	Ø140	Ø49	Ø8.5	M41
AQL-370	260	246	247	130	38	90	205	235	62	83	Ø140	Ø49	Ø10	M41
AQL-550	277	268	272	155	47	93	205	265	66	83	Ø162	Ø49	Ø10	M41
AQL-750	300	286	302	165	58	111	225	265	80	95	Ø173	Ø50	Ø12	M47













HEAT PUMP

Heat Pump

- * AQL Series Designed to match the demends for residential pools
- The housing designed to work under high strength requirements and coated to be rustproof
- Top brand compressors
- Heat exchanger made of titanium that is recognized as the best material for this application
- AQL series machines run efficiently and steadily to keep your swimming pool at the optimum temperature anytime Using 407C as refrigerant, AQL Series helps to keep the atmosphere free of hydro chlorofluoro carbon which is harmful to the ozone layer

 * Heating capacity ranging from 4.2KW up to 25KW

 * CE/Rohs/REACH Certified



MOI	DEL	Heating Capacity KW	Power Input KW	Efficiency COP	Rated Current A	Power Supply	Compressor Unit PCS	Compressor Type	Refrigerant
AQL200	1HP	4.2	0.85	5,0	4.1	220V II 50Hz	1	ROTARY	R407C
AQL400	2HP	8.5	1.7	5,0	8,3	220V II 50Hz	i	ROTARY	R407C
AQL600	ЗНР	13.5	2.6	5,0	12.0	220V II 50Hz	1	ROTARY	R407C
AQL700	4HP	17	3.5	4,9	16,0	220V II 50Hz	1	SCROLL	R407C
AQL700	4HP	17	3.5	4,9	6,0	380V III 50Hz	1	SCROLL	R407C
AQL800	5HP	21	4.5	4,7	21,0	220V II 50Hz	1	SCROLL	R407C
AQL800	5HP	21	4.5	4,7	7,8	380V III 50Hz	1	SCROLL	R407C
AQL900	6HP	25	5.5	4,6	9,6	380√ III 50Hz	1	SCROLL	R407C

МО	DEL	Water Connection mm	W ater Flow m3/h	Length mm	W idth	Height mm	Net Weight Kg	Gross Weight Kg	Heat Exchange
AQL200	1HP	50	>4.0	720	330	500	38	46	
AQL400	2HP	50	>5.0	910	360	650	70	85	
AQL600	ЗНР	50	>7.5	910	360	650	75	90	
AQL700	4HP	50	>8.0	1.1	460	950	97	117	PVC hermetic water barrel
AQL700	4HP	50	>8.0	1.1	460	950	97	117	with spiral soft
AQL800	5HP	50	>9.0	1.1	460	960	110	130	titanium pipes inside
AQL800	5HP	50	>9.0	1.1	460	950	110	130	
AQL900	6HP	50	>10.0	1.1	460	950	115	135	

Note: Heating measuring condition: Ambient dry/wet temperature: 24°C/19°C, Water-in temperature: 27°C, HR= 63%

ONLINE HEAT



Code	Heater Model	κω	Max Working Pressure	Supply Voltage
AQL1111	ST-0338045	11kw	30 PSI	220V
AQL1115	ST-0338046	15kw	30 PSI	220V

We reserve the right to change all or part of the features of the articles or contents of this document, without prior notice, www.aqualuxinc.com

Ready Made Pools

Model: AQL - 8801

19ft X 7ft X 4.5/4.8ft

DIMENSIONS: 5800X2200X1360/1470MM

SEATING CAPACITY: 7PERSONS

Configure: SPA

Hydromassage jet (Stainless steel) 55pcs

Air jet 8pcs 1x0.5HP Circulation pump 1x2.5 HP Hydro massage pump Hydro massage pump 1x2 HP Air blower 1x400W

Heater Ozonator LED optic light SPA LED light

Multi-Function controller 1 set Filter cartridge 1pc Pillow (with LED Lights) 3pcs

POOL:

Hydromassage Jet (Stainless steel)

Swim jet (Stainless steel) Circulation pump Swim Pump

Hydro Massage Pump Ozonator







Led Optic Light Multi-Function controller

Filter cartridge

Pillow (with LED lights)

Acrylic Shell (Aristech acrylic) Ps Synthetic cabinet High density insulation(spa body)

1pc 2pcs

43pcs

1Set

2pc

1 pc

1 set

LANE ROPES

RACING LANE LINE



1x3KW

50mg/h

27pcs

25pcs

3pcs

1x0.5HP

3x3 HP

1x2 HP

1000mg/h 220V

1pc





PRODUCT INFORMATION

Racing Lane's Flow-through controls water turbulence by allowing wave enery to be dispersed along the length of the lane, creating the optimum environment for the fastest swim times. Each lane consists of a series of a 120mm or 150mm polyethylene disks and donuts strung on a stainless steel cable. Each of these disks is designed to rotate independently of the others, thereby allowing the wave energy to be absorbed and dispersed along the channel within the lane. Competitor lanes come completely assembled, Standard Colors - Red, White, Blue, Yellow,



SAUNA HEATER AND STONE





Code	Heater Model	кш	Heating Element KW Type Number	Sa Ro Min	una om Max	Supply Voltage	Size of Heater L/W/H	Size of Wire Heating Elements	Stones	Control
AQL1010	SCA-90	9kw	6Χ15Kw SAV 150	8	14	220V-3N	442/210/650	5X15/5X 2 .5	40-50	Separate

AUTOMATIC CHLORINE FEEDER







This automatic chlorine feeder is designed for installation in the return line to your pool or spa. It uses slow -dissolve Trichloro-S-Triazinetrione (Tri-Chlor)large or small tablets (or sticks) ONLY.

No other type of chemical should ever be used in chlorine feeder. This CHLORINATOR holds up to 9 large (3" diameter)tablet or 4.2lbs, of small tablets and has a dial type control valve to regulate the rate of water through the chlorine feeder.

Counter-Flow System Wall Mounted

This self-contained unit comes complete with pump, control box, unit to control box cable and mounting hardware. It requires no additional equipment for installation.



SS AND ABS COUNTER CURRENT



- * Jet swim house made of stainless steel, front and handle made of polished acid-proof stainless steel AISI 304. For mounting in Concrete, wood or building block walls.
- * Loump Power: 3KW
- * Control box including contractor and overload protection
- * Air mixture control
- * Air mixture hose
- * Hose connectors
- * Hose clamps
- * Hose for suction and pressure Valves





We reserve the right to change all or part of the features of the articles or contents of this document, without prior notice www.aqualuxinc.com





TURBO ELITE IN GROUND ROBOTIC POOL CLEANER

SPECIAL EQUIPMENT (Robot Cleaner)

1. Voltage: 110 VAC(120VAC)/220VAC(230VAC) 2. Frequency: 50Hz60hz 3. Output vollage: DC24V

N.W.20kg; G.W.25.kg: 770x550x460m m=0.19m3

4. Input power: 200W
5. Output power: 150W
6. Cable lenght: 20m/25m(option)

7. Roller width: 358mm

8. Maximum cleaning area:300m

9. Speed, 12.5m/min 10. Warranty: 3years AQL2028PRO



POOL ROVER HYBRID ABOVE GROUND POOL CLEANER

- 1. Pool rover hybrid is the number one robot in its category
- 2. Maximum water flow power + 17m3/h 3. Ideal for pools up to 12m length



SALT CHLORINATOR

CODE	DESCRIPTION	POOL SIZE	CHLORINE OUT PUT PER HOUR
AQL 7050101	AQ Series 25 - no time clock	up to 96 m3/h	25 g/h
AQL 7050102	AQ Series 25TC - no time clock	up to 96 m3 /h	25 g/h
AQL 7050103	AQ Series 30 - no time clock	up to 120 m3/h	30 g/h
AQL 7050104	AQ Series 30TC - no time clock	up to 120 m3/h	30 g/h
AQL 7050105 AQ Series 30LT - time clock and light transform		up to 120 m3/h	30 g/h
AQL 7050106	AQ Series 42 - no time clock	up to 160 m3/h	42 g/h
AQL 7050107	AQ Series 42TC - no time clock	up to 160 m3/h	42 g/h



Steam Generator

Code	Volts	Power(kw)	Phase
AQL-60	380V 50-60Hz	6	3N
AQL-90	380V 50-60Hz	9	3N
AQL-120	380V 50-60Hz	12	3N
AQL-180	380V 50-60Hz	18	3N
AQL-240	380V 50-60Hz	24	3N







Starting Block

Code	Picture	Description	Remarks
AQL131	T	Diving Board	Fiberglass+basi to make the blue part, the other part is stainless steel
AQL132		Diving Board	Fiberglass+basi to make the blue part, the other part is stainless steel
Beach Bed			
AQL133	A	Beach Bed 1920*770*350mm	Material : PVC, Outdoor Furniture

Integrative Filter/ Pipeless Filter


Code	Picture	Description	Remarks
AQL-Y04		Integrative Pipeless Filter System Power: 220V/50Hz or 60Hz Underwater Light: LED 12V/4W Rated Water Flow: 20-28m³/h Fliter Media: Upont Filter Bag N.W: 70kgs Color: White Body, Green Top Co	ver

NOTE





0

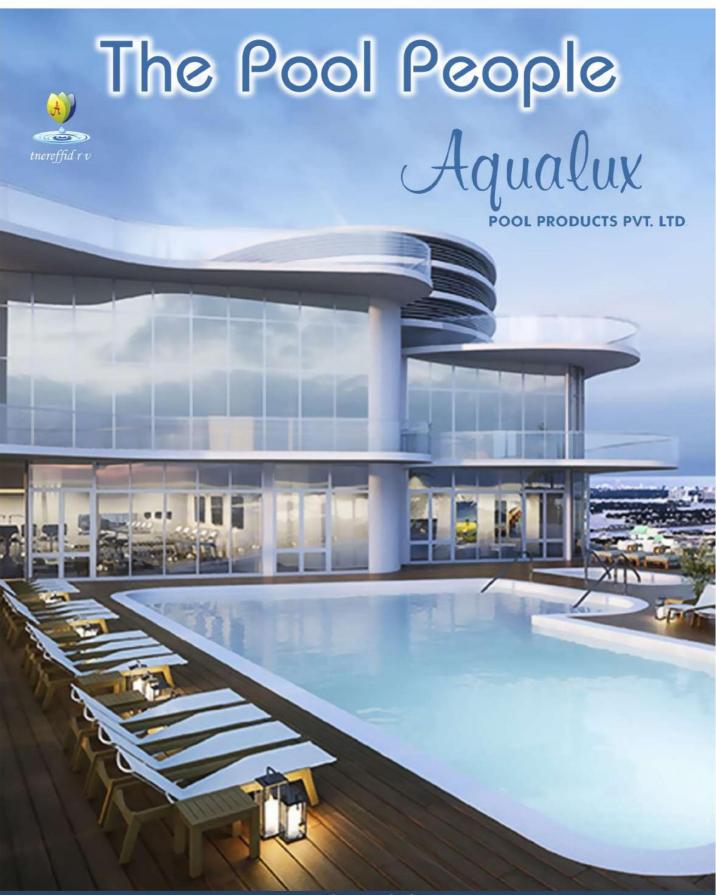

Suite 101, "THE REIGN" #149, 11th "C" Cross, W.O.C.Road II Stage, Bangalore 560086. INDIA +91 80 23493126 / +91 9986202221

www.aqualuxinc.com info@aqualuxinc.com / sales@aqualuxpoolproducts.com

> Copyright: Aqualux Pool Products. Pvt. Ltd. All Specifications are subject to change and without prior notice.